



Grandstream Networks, Inc.

GWN7602

WiFi Access Points

Antenna Radiation Patterns



Table of Content

INTRODUCTION	3
TERMINOLOGY	4
TEST ENVIRONMENT	5
GWN7602 ANTENNA CHARACTERISTICS	6
Antenna Patterns	6

Table of Figures

Figure 1: Polar Coordinates	4
Figure 2: Test Environment	5

Table of Tables

Table 1: GWN7602 Antenna Radiation Patterns	6
---	---



INTRODUCTION

One of the major components of a wireless Access Point is the antenna. These radio components come with different shapes and sizes to fit specific deployment needs, and each access point can bundle multiple antennas for sending and receiving signals in order to benefit from the MIMO (Multiple Input/Multiple Output) technology and obtain higher throughput and signal resilience, also the arrangement of multiple antennas internally to a single WLAN access point can be used to influence the shape and behavior of the wireless signal (both on transmit and receive). To better understand how each GWN access point model broadcasts wireless signal, this paper provides radiation patterns to help engineers during the deployment process.

The GWN7602 is a compact Wi-Fi access point designed for small businesses, homes, offices, hotels and more. It provides three 100Mb ports to provide IP phones, IPTV, computers and similar devices with Ethernet while also providing an uplink Gigabit network port with PoE/PoE+ and PSE. The GWN7602 offers dual band 2x2:2 MIMO technology and a sophisticated antenna design for ideal network throughput that supports up to 80 clients and a 100 meter coverage range. To ensure easy installation and management, the GWN7602 is supported by GWN.Cloud, Grandstream's free cloud Wi-Fi management platform. The GWN7602 is the ideal Wi-Fi AP for voice-over-Wi-Fi deployments and offers a seamless connection with Grandstream's Wi-Fi-capable voice and video IP phones. By including support for advanced QoS, low-latency real-time applications, mesh networks and captive portals, the GWN7602 is a wireless access point built for deployment scenarios with small to medium user density.

We begin this report with a glossary of basic definitions related to antennas radio characteristics and then progress through the specific radiation patterns for GWN7602 access point series.



TERMINOLOGY

On this first part, we will provide quick brief review of some fundamental concepts related to antennas and radio propagation:

Antenna: An antenna is a transducer between a feed signal and radiated wave over the space, it is usually attached to a transmitter/receiver unit and the radiated energy is characterized by the antenna's radiation pattern.

Antenna pattern: The radiation pattern or antenna pattern is the graphical representation of the radiation properties of the antenna and how it radiates energy out into space or how it receives energy (reciprocity). An antenna radiates energy in all directions, at least to some extent, so the antenna pattern is actually three-dimensional. It is common, however, to describe this 3D pattern with planar patterns, called the principal plane patterns. These principal plane plots are commonly referred to as the antenna radiation patterns.

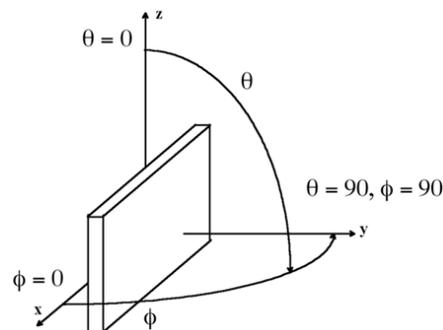


Figure 1: Polar Coordinates

Isotropic radiator: An isotropic radiator is a hypothetical lossless antenna that radiates its energy equally in all directions. This imaginary antenna would have a spherical radiation pattern and the principal plane cuts would both be circles since any plane cut through a sphere would be a circle.

Gain: The gain of an antenna (in a given direction) is defined as the ratio of the power gain in that direction to the power gain of a reference antenna in the same direction, usually an isotropic radiator is set as reference and the value of the gain is expressed in dBi. It is important to state that an antenna with gain doesn't generate power and it does simply direct the way the radiated power is distributed relative to radiating the power equally in all directions, thus the gain is just a characterization of the way the power is radiated.

Efficiency: The efficiency of an antenna is a ratio of the power delivered to the antenna relative to the power radiated from the antenna. A high efficiency antenna has most of the power present at the antenna's input radiated away. A low efficiency antenna has most of the power absorbed as losses within the antenna, or reflected away due to impedance mismatch. What causes an antenna to not have an efficiency of 100%.

Antenna efficiency losses are typically due to:

- Conduction losses (due to finite conductivity of the metal that forms the antenna).
- Dielectric losses (due to conductivity of a dielectric material near an antenna).
- Impedance mismatch loss.



TEST ENVIRONMENT

This test report gives schematic diagrams with antennas distribution of GWN76XX access points series, along with the antenna radiation patterns both 2.4Ghz and 5Ghz frequencies in order to help engineers during deployment process.

Please note that these radiation patterns are gathered in a fully anechoic environment. Their shape will change in installed environments depending on the obstacles that the wireless signal might face. Every deployment will behave differently due to materials, geometries of structures, etc and how these materials behave at 2.4GHz and 5GHz.

Below figure gives an overview of the used test environment:

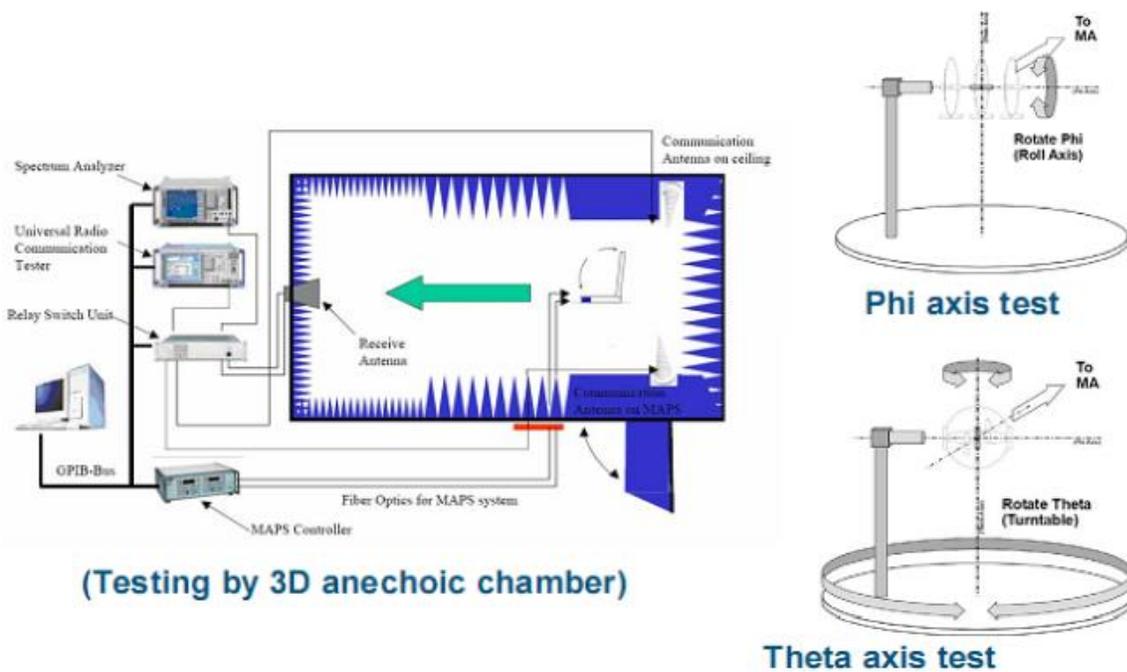


Figure 2: Test Environment




GWN7602 ANTENNA CHARACTERISTICS


Antenna Patterns

On this section, we provide the resulting antenna radiation patterns for GWN7602 access point from the conducted test, the pattern plots provided are for elevation (vertical) plane and azimuth (horizontal) plane as well as the 3D mapped model.


Table 1: GWN7602 Antenna Radiation Patterns

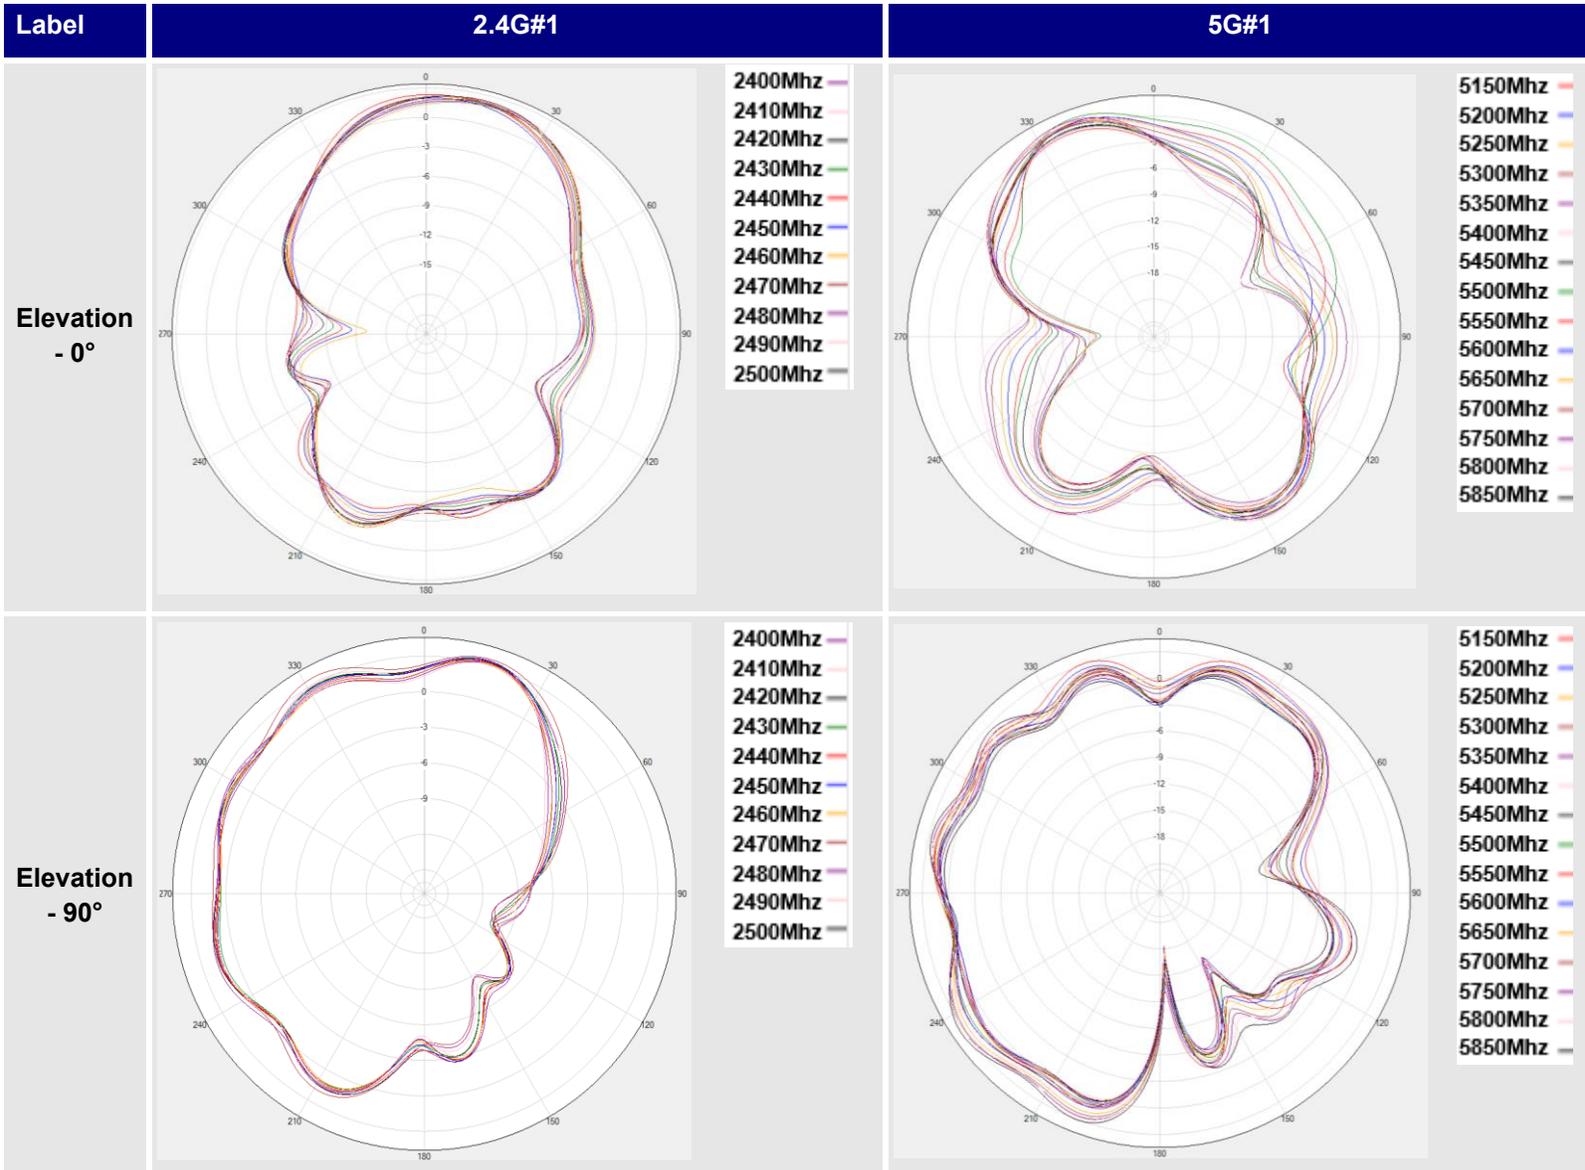

Azimuth


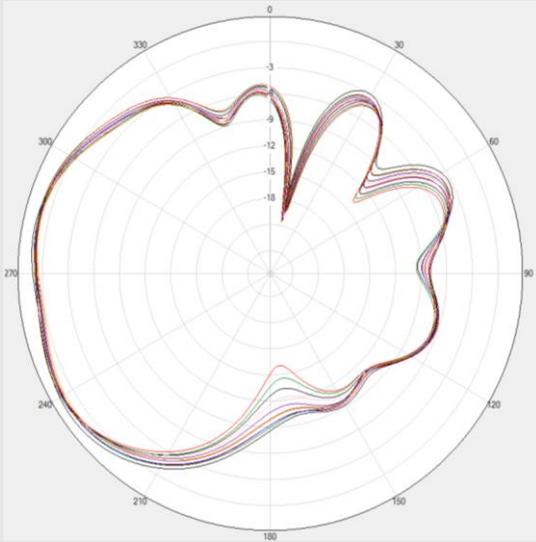



- 2400Mhz
- 2410Mhz
- 2420Mhz
- 2430Mhz
- 2440Mhz
- 2450Mhz
- 2460Mhz
- 2470Mhz
- 2480Mhz
- 2490Mhz
- 2500Mhz

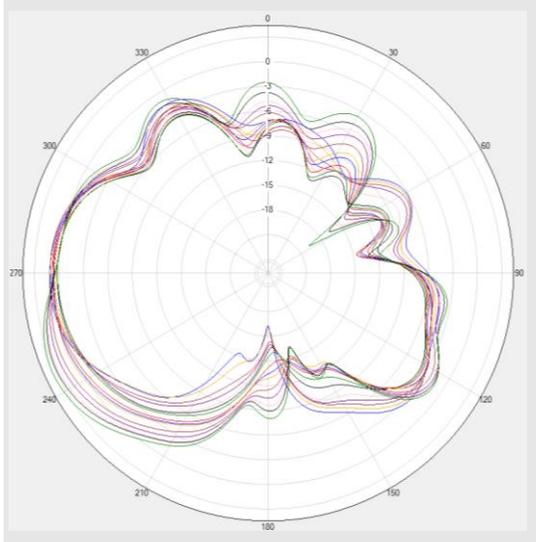


- 5150Mhz
- 5200Mhz
- 5250Mhz
- 5300Mhz
- 5350Mhz
- 5400Mhz
- 5450Mhz
- 5500Mhz
- 5550Mhz
- 5600Mhz
- 5650Mhz
- 5700Mhz
- 5750Mhz
- 5800Mhz
- 5850Mhz

3D model

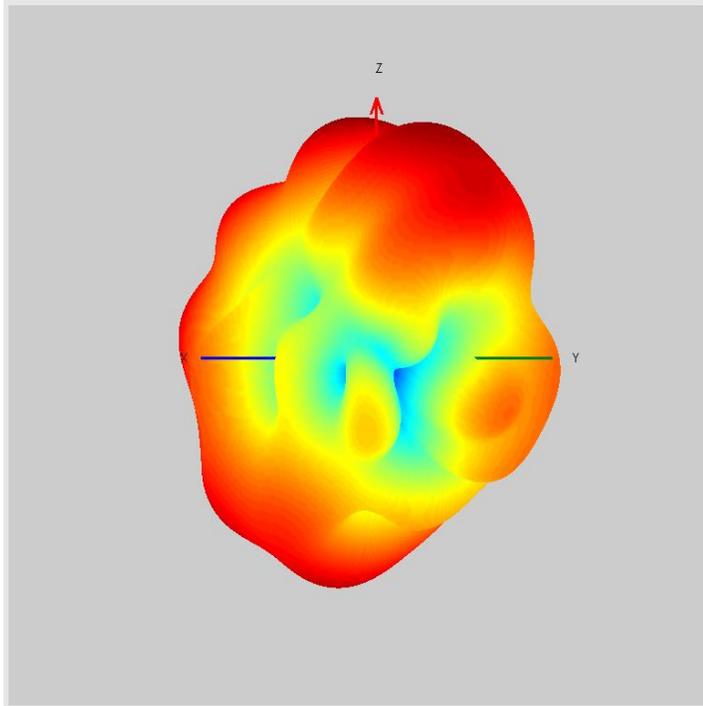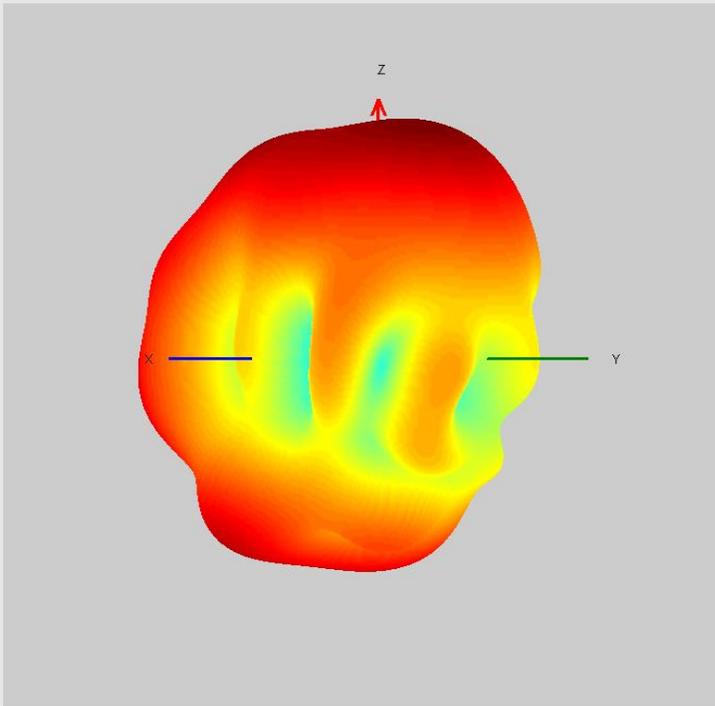


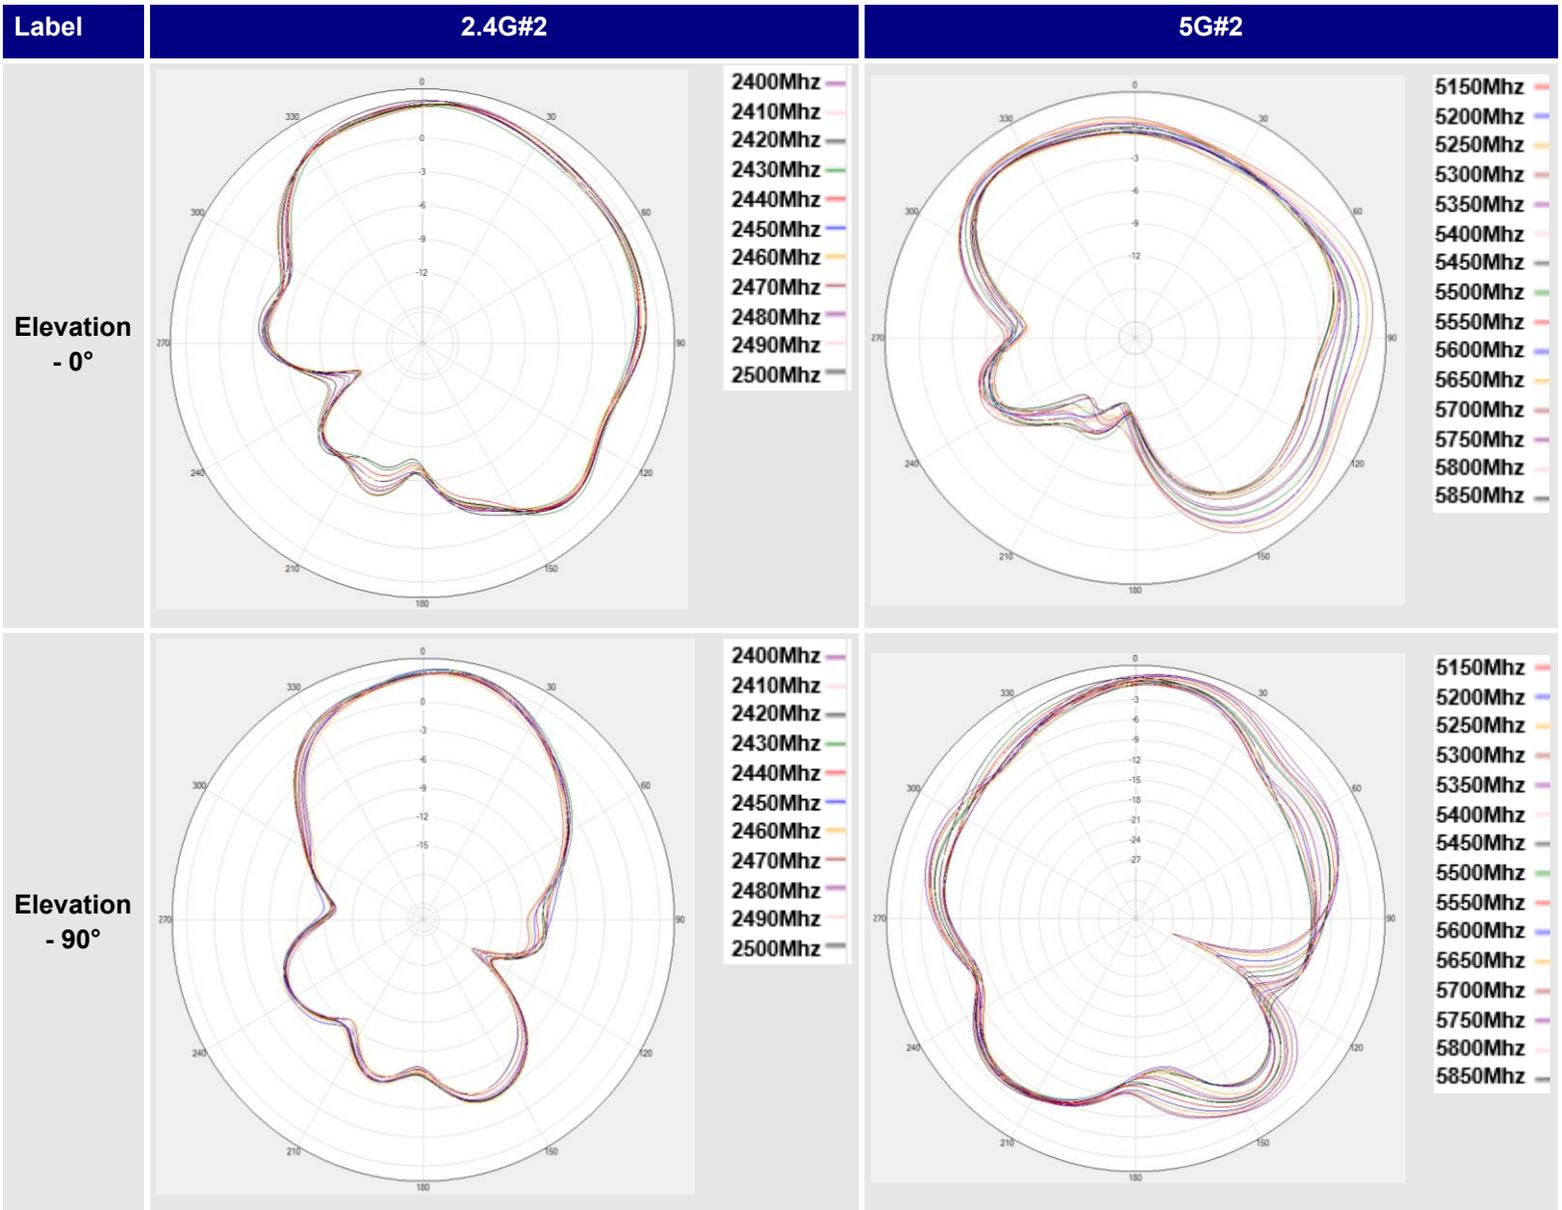

Azimuth

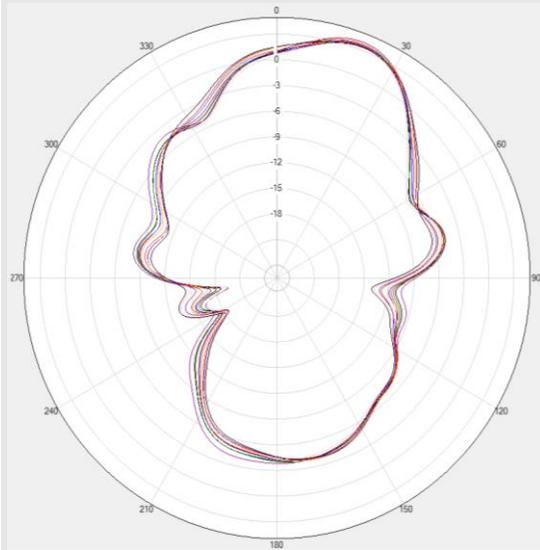

- 2400Mhz
- 2410Mhz
- 2420Mhz
- 2430Mhz
- 2440Mhz
- 2450Mhz
- 2460Mhz
- 2470Mhz
- 2480Mhz
- 2490Mhz
- 2500Mhz

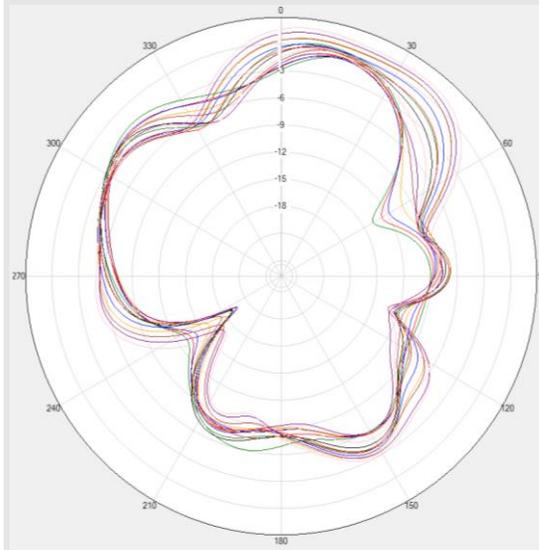

- 5150Mhz
- 5200Mhz
- 5250Mhz
- 5300Mhz
- 5350Mhz
- 5400Mhz
- 5450Mhz
- 5500Mhz
- 5550Mhz
- 5600Mhz
- 5650Mhz
- 5700Mhz
- 5750Mhz
- 5800Mhz
- 5850Mhz

3D model

