


GRP2624/GRP2634_WM

GRP2624/GRP2634 IP Phones **Wall Mount Bracket**

Quick Installation Guide



Grandstream Networks, Inc.

126 Brookline Ave, 3rd Floor Boston, MA 02215. USA Tel: +1 (617) 566 - 9300

Fax: +1 (617) 249 - 1987

www.grandstream.com







For Certification, Warranty and RMA information, please visit www.grandstream.com

Content


English		

EN OVERVIEW

This guide provides instructions for mounting your GRP2624/GRP2634 series phone to the wall. Provided instructions apply to GRP2624/GRP2634 models and the GRP2624/GRP2634_WM bracket model.

Note: The wall mount bracket is sold separetely (not included in the GRP2624/GRP2634 series phone package).

PACKAGE CONTENTS




Note: Screws and anchors required for wall mount installation are not included in this package.

ADJUSTING HOOKSWITCH TAB


Make sure to adjust the hookswitch tab position up to hold the handset while the phone is mounted on the wall (tab wih extension down is recommeded for desktop usage).

- 1. Pull out the tab from the handset cradle.
- 2. Rotate the tab to extension up.
- 3. Plug it back into the slot with the extension up.

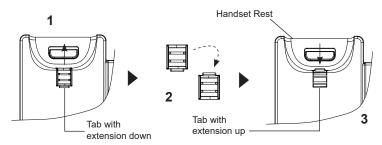

INSTALLING WALL MOUNT BRACKET

- 1. Put the wall mount's ribs into the unit's groove.
- 2. Press this position and install the wall mount.
- 3. The wall mount is installed completely.

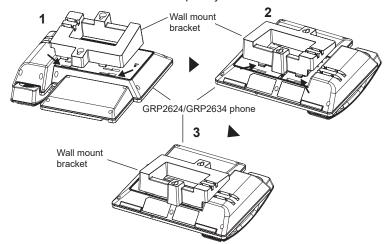

MOUNTING THE PHONE TO THE WALL

- 1. Use the wall mount bracket to mark two vertical dots using "wall mount slots" on the wall where the phone will be installed.
- Using a drill, make a hole on each marked dot. Put a plastic anchor and screw (not provided) on each hole. Leave enough space to attach the wall mount bracket to the wall.
- 3. Mount the GRP2624/GRP2634 phone with wall mount bracket attached to the wall using wall mount slots.

